

SECA-TRAC®


TRAFFIC MANAGEMENT



SECA-TRAC®

TRAFFIC MANAGEMENT

PRODUCT CATALOGUE

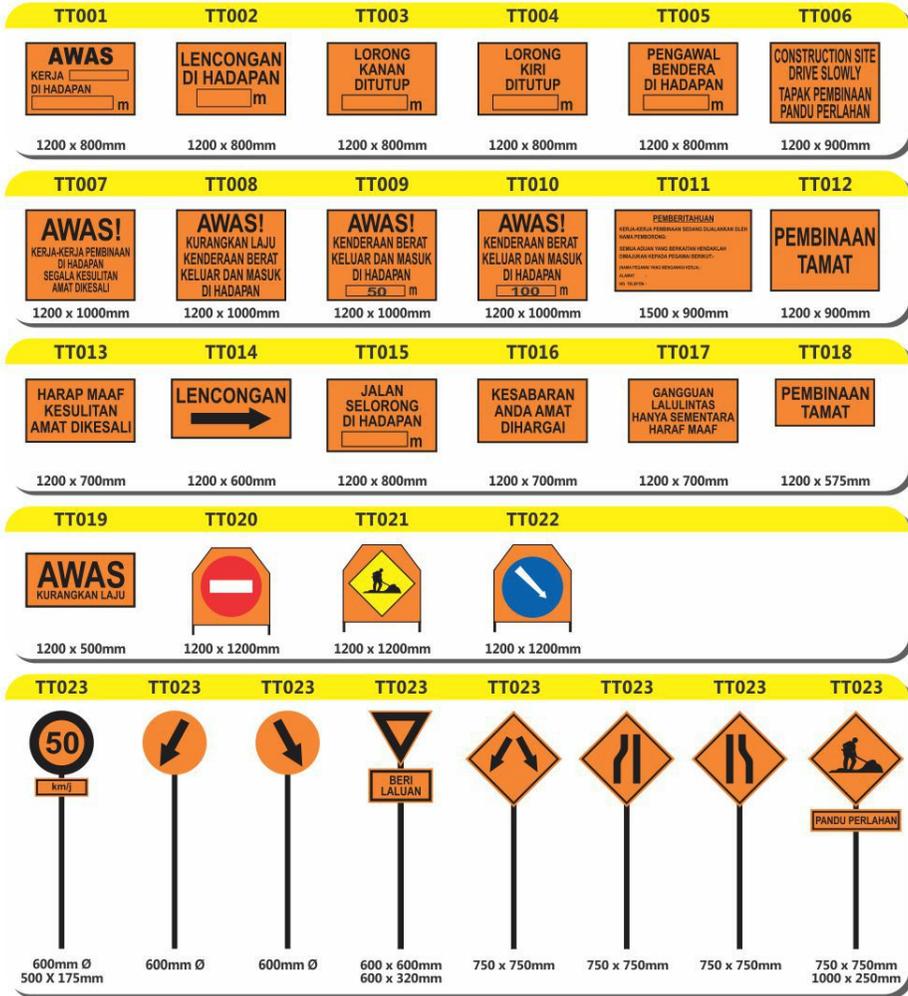

00

CONTENTS

- 01** SPEED HUMP
- 03** TECHNICAL PARAMETER
- 04** CONVEX MIRROR
- 05** POLE ACCESSORIES & INSTALLATION GUIDE
- 06** COMPARISON & SIZING GUIDE
- 07** DOME MIRROR
- 08** PLASTIC/METAL BARRICADE & VEHICLE DOLLY
- 09** SAFETY VEST, PVC FLOOR SIGN & TRAFFIC FLAG
- 10** BOLLARD
- 11** TRAFFIC CONE
- 12** CONE AND ROAD BARRIER ACCESSORIES
- 13** CAR STOPPER & CORNER PROTECTOR
- 15** ROAD BARRIER & HOARDING
- 16** PARKING LOCK, WHEEL CHOCK/CLAMP & FENDER
- 17** TRAFFIC SIGNS
- 19** TEMPORARY TRAFFIC SIGNS

SECA-TRAC®
TRAFFIC MANAGEMENT



SECA-TRAC® Rubber speed humps are raised devices, parabolic in shape, and ideally be installed in a series to create ongoing traffic calming. The speed humps are best placed at mid-intersection or roads with low speed limits.



PREMIUM RUBBER SPEED HUMP
(WITH INTERLOCKING)

Model SH380
Size 380mm x 1000mm x 50mm
Weight 16.0 kg / meter



PREMIUM RUBBER END CAP 380
(WITH INTERLOCKING)

Model SH-EC380
Size 250mm x 380mm x 50mm
Weight 2.5 kg / pc



RUBBER SPEED HUMP

Model SH350
Size 350mm x 500mm x 50mm
Weight 14.0 kg / meter



RUBBER END CAP 350

Model SH-EC350
Size 175mm x 350mm x 50mm
Weight 1.5 kg / pc

WD.2 	WD.3 	WD.4 	WD.10a 	WD.10b 	WD.14
400 x 400mm 600 x 600mm 750 x 750mm					
WD.16 	WD.17 	WD.18 	WD.19 	WD.20 	WD.21
400 x 400mm 600 x 600mm 750 x 750mm					
WD.22 	WD.23 	WD.25 	WD.26 	WD.27a 	WD.27b
400 x 400mm 600 x 600mm 750 x 750mm					
WD.27c 	WD.27d 	WD.27e 	WD.28a 	WD.28b 	WD.29
400 x 400mm 600 x 600mm 750 x 750mm					
WD.31 	WD.32a 	WD.32b 	WD.33 	WD.36 	WD.37
400 x 400mm 600 x 600mm 750 x 750mm					
WD.38a 	WD.38b 	TF001 	TF002 	WD.37 	
400 x 400mm 600 x 600mm 750 x 750mm				SEKOLAH HAD LAJU 30 km/j 480 x 600mm 600 x 750mm	

RP.1  600 x 600mm	RP.2a  600mm Ø	RP.2b  600mm Ø	RP.3  600mm Ø	RP.4  600mm Ø	RP.5  600mm Ø
RP.6  600mm Ø	RP.10  600mm Ø	RP.11  600mm Ø	RP.14  600mm Ø	RP.15  600 x 600mm	TF005  600 x 600mm
TF006  600mm Ø	TF007  600mm Ø	TF008  600mm Ø	TF010  600mm Ø	TF011  600mm Ø	TF012  600mm Ø
TF006  600mm Ø	TF007  600mm Ø	RP.7  600mm Ø 500 x 170mm	RP.13  600mm Ø 500 x 170mm	GI.6  600mm x 900mm	GI.9  600mm x 900mm
GI.8  750 x 600mm	GI.4  530 x 530mm	RM.1a  600mm Ø	RM.1b  600mm Ø	RM.1c  600mm Ø	RM.1d  600mm Ø
RM.4  600mm Ø					

INSTALLATION METHOD



1. Clean the surface so that it is free from dirt. Placed the speed hump sections and end caps into the installation position.
2. Mark the location of each hole using the pre-drilled holes as a template. Make certain the units are square and straight. Remove the sections. Use high-speed drill and drill a hole at each marked location to a minimum depth of 3" below the surface.
3. Insert one anchor into each hole. Using the hammer or mallet, tap the anchors in so they are flush with the surface.
4. Realign the sections with the pre-drilled holes. Slip washer onto bolt, tighten the nut. Repeat for each hole.
5. Finish tightening each bolt until just snug. DO NOT OVER TIGHTEN! Excessive tightening may damage the bump and void the product warranty.
6. Installation completed.

KEY FEATURES




- Steel washers molded into each mounting point.
- 4 nos. of clear reflectors insert per section.
- Able to withstand 5 tons of vehicle running over at 30km/h.


INTERLOCKING



Unique keyed design INTERLOCKING SYSTEM each section and enhance overall strength of the hump and reduce tearing force at each anchorage point.

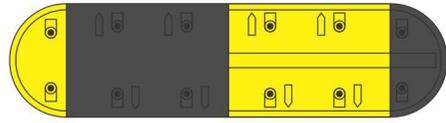


SPEED HUMP 350

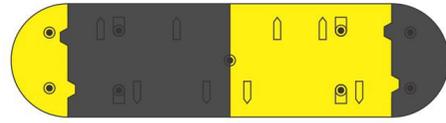


SPEED HUMP 380

SPEED HUMP 350

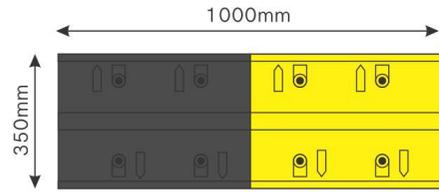


Thickness : 50mm
Weight : 14kg /meter
Material : Vulcanized Recycle Rubber




Thickness : 50mm
Weight : 1.5kg/pc
Material : Vulcanized Recycle Rubber

SPEED HUMP 380 (INTERLOCKING SYSTEM)

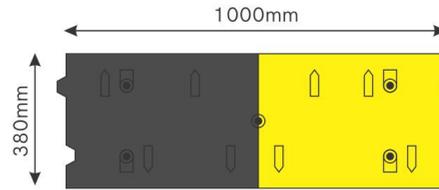


Thickness : 50mm
Weight : 16kg /meter
Material : Premium Vulcanized Recycle Rubber

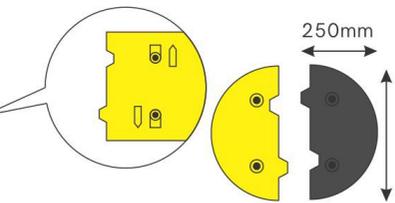

Thickness : 50mm
Weight : 2.5kg/pc
Material : Premium Vulcanized Recycle Rubber

WHEEL CLAMP



Designed to prevent vehicles from being moved. Prevent your vehicles from theft. Designed to fit of wheel & tyres sizes

- Model (A) ST WHEEL CLAMP-BIG
ST WHEEL CLAMP-SMALL
- (B) ST-ULOCK
- Size (A) 960mm(W) x 930mm (L) - BIG
850mm(W) x 630mm (L) - SMALL
(B) 185mm(W) X 295mm (L)

T-SHAPE ADJUSTABLE PARKING LOCK



To lock parking bay from unauthorised vehicles

- Model TAPL
- Size 500mm x 420mm x 80mm
- Weight 6.6 kg

WHEEL CHOCK



Provides maximum all-weather stopping power for transportation during maintenance, loading or emergency procedures. Eye bolt included

- Model ST-WC
- Size 190mm(H) x 240mm (W)
- Weight 5.5 kg

REMOTE CONTROL PARKING LOCK



Battery operated. Remote control parking lock (to lock parking bay from unauthorised vehicle)

- Model UTPL-T03
- Size 480mm x 400mm x 75mm

HOLLOW RUBBER FENDER



It is resistant to all types of weather. These bumpers are used for edge protection, cushioning, and impact absorption to minimize the damage in case of collision

- Model RFH-D
- Size All sizes available upon request


SOLID TYPE RUBBER FENDER




It is resistant to all types of weather. These bumpers are used for edge protection, cushioning, and impact absorption to minimize the damage in case of collision

- Model RFH-R
- Size All sizes available upon request


FRONT VIEW



TOP VIEW



SIDE VIEW




ROAD BARRIER

Model RB1M-W / RB1M-O
Size 800 x 110 x 500mm

High visibility, temporary/ long term placement water fillable. The interlocking pin allows you to create curves/ angles while creating a single solid wall

FRONT VIEW



TOP VIEW



SIDE VIEW



EXTEND HOARDING

Model HOARDING-O / HOARDING-W
Size 2220 x 1000 x 520mm


To increase length for road barrier and to create safer work space behind the barrier



AVAILABLE IN THESE MATERIAL :

✔ STAINLESS STEEL

✔ POLYCARBONATE

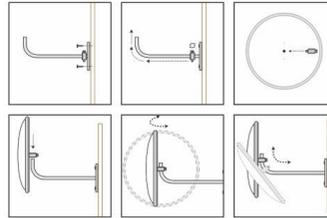

INSTALLATION METHOD OF CONVEX MIRROR (INDOOR)

- Decide the appropriate place to site the mirror to give maximum vision.
- Fix J-Bracket to wall or ceiling using suitable fixing hardware (ie: screws, bolts).
- Allowing enough room to get the mirror on to the J-Bracket.
- Thread adapter into the back of the mirror.
- Slide the adapter and mirror over the J-Bracket and adjust mirror to desired position.
- Tighten the locking bolt on the adapter securely.
- Peel off protective film around the immediate edge of the mirror.

INSTALLATION METHOD OF CONVEX MIRROR OUTDOOR)

- Decide the appropriate place to site the mirror to give maximum vision.
- Decide whether to use wall mount elbow bracket or pole for the placement of mirror.
- Slide the adapter and mirror over the bracket/pole and adjust mirror to desired position.
- Tighten the locking bolt on the adapter securely.
- Peel off protective film around the immediate edge of the mirror.


POLYCARBONATE

INDOOR		OUTDOOR	
SIZE (MM)	MODEL	SIZE (MM)	MODEL
300	PCM-IN300	600	PCM-OUT600
450	PCM-IN450	800	PCM-OUT800
600	PCM-IN600	1000	PCM-OUT1000


STAINLESS STEEL

INDOOR		OUTDOOR	
SIZE (MM)	MODEL	SIZE (MM)	MODEL
490	SSM-IN490-C	490	SSM-OUT490
600	SSM-IN600-C	600	SSM-OUT600-Z
		800	SSM-OUT800-Z
		1000	SSM-OUT1000-Z

POLE ACCESSORIES

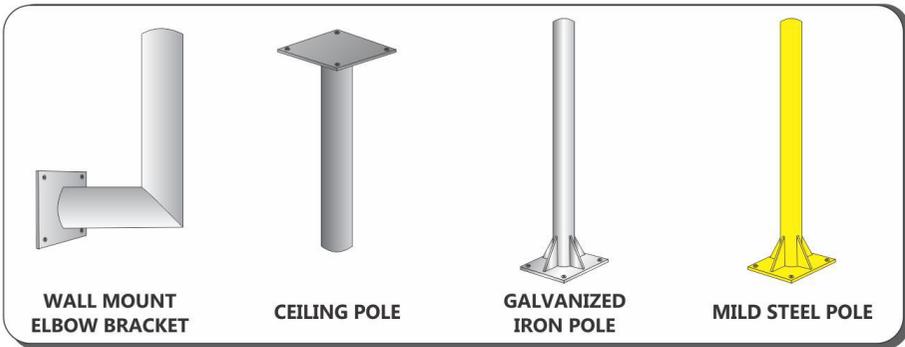

INSTALLATION GUIDE

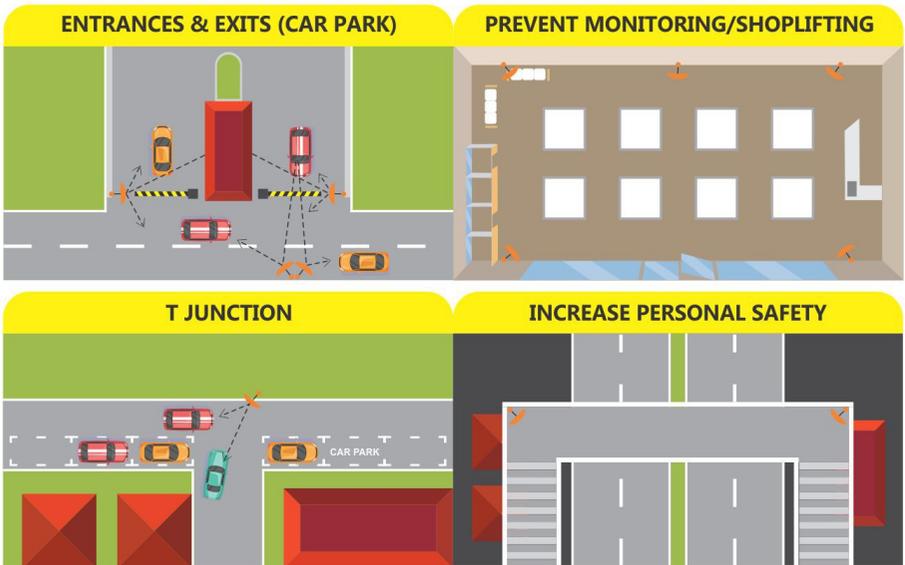

YELLOW CORNER PROTECTOR



Available in various sizes

- Model RCP-Y
- Size 100mm(W) x 100mm(W) x 800mm(L)
100mm(W) x 100mm(W) x 900mm(L)
- Weight 2.0 kg / 2.3 kg


3M ALUMINIUM ROAD STUD



Premium 3M aluminium road stud

- Model RSDY-290AI
- Size 23mm(H) x 101mm(W) x 91mm (L)

ALUMINIUM ROAD STUD



Basic aluminium road stud

- Model RSDY
- Size 20mm(H) x 100mm(W) x 100mm (L)

PLASTIC ROAD STUD



Alternative to aluminium road stud, recommended for indoor application

- Model RSDY-PLASTIC
- Size 20mm(H) x 100mm(W) x 100mm (L)
- Material ABS

METAL DETECTOR



Automatic tuning. Using single rechargeable or standard 9V battery. Up to 20 hours on each 12 hours recharge

- Model HMD-SS
- Size 16 inch (L)
- Weight 0.5 kg

INSPECTION MIRROR



12" round mirror ; Handles extend from 42" to 51" light weight aluminium, tripod ball bearing with caster wheels, LED flashlight with mounting bracket

- Model MR-SIM-V1
- Size 12 inch round mirror
- Handle Extend from 42" to 51"

RUBBER CAR STOPPER



Easy to deploy to parking bay. Made by premium vulcanized recycle rubber

- Model RCS-550
- Size 100mm(H) x 150mm(W) x 550mm(L)
- Weight 4.5 kg

ECONOMIC RUBBER CAR STOPPER



Basic rubber car stopper. Made by vulcanized recycle rubber

- Model UTWS-R006
- Size 100mm(H) x 150mm(W) x 550mm(L)
- Weight 3.5 kg

FULL SIZE RUBBER CAR STOPPER



Full length car stopper, ideal for indoor/outdoor application. Made by premium vulcanized recycle rubber

- Model RCS-183
- Size 100mm(H) x 150mm(W) x 1830mm(L)
- Weight 17.0 kg

CONCRETE CAR STOPPER



Available in various sizes

- Model CCS
- Size (1) 100mm(H) x 150mm(W) x 600mm(L)
(2) 100mm(H) x 150mm(W) x 1830mm(L)
- Weight (1) 19.0 kg+- / (2) 57.0 kg

METAL/ALUMINIUM CORNER PROTECTOR



Available in various sizes

- Model MCP-AL / MCP-MS
- Size (MCP-AL) 100mm(W) x 100mm(L) x 1000mm(L)
(MCP-MS) 76mm(W) x 76mm(W) x 1000mm(L)

RUBBER CORNER PROTECTOR



Customizable with different colour reflector


- Model RCP
- Size 100mm(W) x 100mm (W) x 800mm(L)
- Weight 1.9 kg

MATERIAL	STAINLESS STEEL	POLYCARBONATE
WEATHER RESISTANCE		
IMPACT RESISTANCE		
REFLECTIVENESS		
LIFESPAN (YEARS)	>5 YEARS	<2 YEARS
STAINLESS STEEL OVER OTHERS	THE REFLECTIVENESS OF STAINLESS STEEL INCREASE OVER TIME	

REMARKS:


BEST GOOD NORMAL POOR VERY POOR

VIEWING DISTANCE VS MIRROR RADIUS & MIRROR SIZE SELECTION

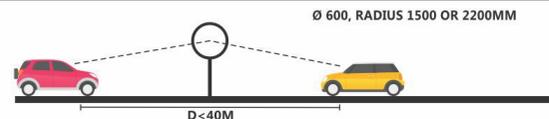


VIEWING DISTANCE LESS THAN 40M

APPROPRIATE MIRROR : Ø 600MM
MIRRO RADIUS : 1500MM OR 2000MM

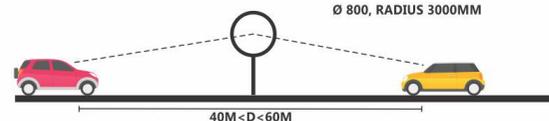

VIEWING DISTANCE IS BETWEEN 40M & 60M

APPROPRIATE MIRROR : Ø 800MM
MIRRO RADIUS : 3000MM

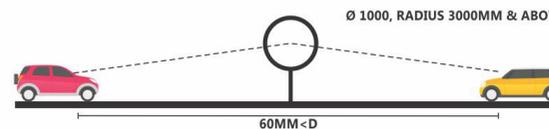

VIEWING DISTANCE MORE THAN 60M

APPROPRIATE MIRROR : Ø 1000MM
MIRRO RADIUS : 3000MM & ABOVE

FULL - 360°




AVAILABLE IN THESE MATERIAL :

✓ ACRYLIC




INSTALLATION METHOD OF DOME MIRROR



FULL DOME MIRROR 360°



HALF DOME MIRROR 180°



QUARTER DOME MIRROR 90°

HALF - 180°



QUARTER - 90°



	QUARTER-90°	HALF-180°	FULL-360°
SIZE (MM)	MODEL	MODEL	MODEL
300	AQDM-300	AHDM-300	AFDM-300
450	AQDM-450	AHDM-450	AFDM-450
600	AQDM-600	AHDM-600	AFDM-600
800	AQDM-800	AHDM-800	AFDM-800
1000	AQDM-1000	AHDM-1000	AFDM-1000

REFLECTIVE DELINEATOR ROPE



Use for crowd control, traffic flow, or marking dangerous areas

- Model RDP-Y / O / S
- Size 50m (L)
- Weight 0.5 kg
- Colour Yellow / Orange / Silver

CONE CONNECTOR



Connector for plastic chain and cone topper. Fits on cones to be used to support chains

- Model SCC-R / SCC-Y
- Size 76 - 87mm (Diameter)

PLASTIC CHAIN



Available in red/yellow colour

- Model PLC-RD / YL
- Size 6mm x 25m
- Colour Red / Yellow

Reflective Delineator Rope

Cone Connector
Plastic Chain



CONE TOP RETRACTABLE BARRIER TAPE



Fixed on most standard traffic cones. Easy to set up or remove. Four ways connectivity for cordoning off a restricted area or building a temporary barrier

- Model RBT
- Size 250mm (H), 75mm (D)
3m diagonal stripes belt

BATTERY HAZARD WARNING LIGHT



LED bulb with automatic light sensor

- Model WL-Y, WL-R, WL-B

SOLAR HAZARD WARNING LIGHT



Solar hazard warning light requires no battery change

- Model HWL-S-AM

**PVC TRAFFIC CONE
(HIGHWAY GRADE)**



Premium PVC body, able to withstand impact, sufficient weight for placement highway

Model	TC-30R-PVC
Size	750mm(H)
Weight	3.5 kg
Base	360mm x 360mm

ADAPTA BASE



Adapta base can be filled with water and sand to increase stability

Model	ST-ADAPTA
Size	510mm x 510mm
Weight	5.0 kg

**PE TRAFFIC CONE
(SAND BASE)**



Premium PE traffic cone, can be used with adapta base to increase height

Model	TC-30
Size	750mm(H)
Weight	4.0 kg
Base	390 mm x 390mm

**PE TRAFFIC CONE
(RUBBER BASE)**



Economic PE cone with rubber base. Cone can be replaced separately

Model	TC-30R
Size	750mm(H)
Weight	2.5 kg
Base	380mm x 380mm

COLLAPSIBLE CONE



Ideal for putting in the car boot or under your seat for emergency or maintenance work. Height adjustable and higher visibility

Model	RCS675
Size	610mm(H)
Weight	2.5 kg

RETRACTABLE CONE



Convenient to use, enhances caution effects, light weight, retractable for easy storage

Model	FTSC28
Size	710mm(H)
Weight	0.9 kg

**METAL EXPANDABLE
BARRICADE**



Portable, expand up to 2 meter, easy to move around (with castor wheels)

Model	UTEB-1S01
Size	Open: 2300mm(L) / Close: 280mm(L)
Height	103mm
Weight	8.0 kg
Footprint	450mm x 280mm

**PLASTIC EXPANDABLE
BARRICADE**



Expand up to 2.5 meter. Fillable with water to improve stability

Model	PEB
Size	960mm (H)
Weight	16.0 kg
Footprint	250mm x 400mm

**PLASTIC EXPANDABLE
BARRICADE C/W WHEEL**



Easy to use, easy to maneuver highly visible mobile safety barrier, extend to 13 feet with articulating panels that can be set straight, curved, or in a circle

Model	PEB-W
Size	Open: 3800mm(L) / Close: 320mm(L)
Weight	16.0 kg
Footprint	300mm x 610mm


EXPANDABLE POLE



Length of bar adjustable from 4" to 7"

Model	EPYB / EPRW
Size	Expand up to 2.5m
Weight	0.5 kg
Colour	Yellow/Black, Red/White

**CROWD CONTROL
BARRICADE**



Suitable for event crowd control. Comes with connecting socket hook

Model	MTB / MTB-W
Size	42 (H) x 48 inch (L)

**VEHICLE DOLLY
C/W HOLDER**



These hydraulic wheel dollies are designed to move any stalling vehicle by pivoting with two dollies or freely moving with four dollies

Model	UTPL-M01
Size	680mm x 620mm x 200mm
Weight	20.0 kg

SAFETY VEST (HI-VIS)



CUSTOMIZED GRAPHIC SAFETY VEST

High Visibility reflective tape. Suitable for both day & night visibility

- Model SV-VH4HG / SV-VH4OR
- Size M / L / XL
- Colour GREEN / ORANGE

SAFETY VEST (MESH TYPE)



Light weight, breathable mesh construction

- Model SV-EMHG / SV-EMOR
- Size M / L / XL
- Colour GREEN / ORANGE

V-SHAPED REFLECTIVE SAFETY VEST



High Visibility reflective tape. Suitable for both day & night visibility

- Model SV-V-Y
- Size FREE SIZE
- Colour YELLOW

PVC FLOOR SIGN



Message can be tailored to customer's request

- Model SFS-PLAIN
- Size 25 inch (H)
- Weight 0.9 kg

TRAFFIC FLAG (FOR FLAGMAN)



For flagman on traffic control

- Model FLAG - R/G
- Size 375mm x 280mm
- Stick 600mm (L)
- Colour Green / Red
- Material Cotton

PLASTIC TRIANGLE REFLECTOR



Warns the driver for hazard ahead. Foldable and easy for storage.

- Model ST-TR/PLASTIC
- Size 160mm x 160mm x 160mm
- Weight 0.2 kg

PREMIUM REBOUNDABLE POLE



Premium PU material bollard able to endure repeated impacts & wheel overs

- Model FP30-PU
- Size 750mm(H)
- Weight 1.9 kg

LANE BLOCK



Used to separate lanes & preventing vehicles from entering an area/changing lanes

- Model RLB-800
- Size 200mm(W) x 130mm(H) x 800mm(L)
- Weight Base : 12.0 kg / Post : 1.0 kg

FRP BOLLARD



Foam filled FRP bollard, installed permanently for traffic control and prevent ram-raiding or car ramming

- Model FRP-BOLLARD
- Size 912mm(H) x 195mm(Top)
- Weight 10.0 kg
- Base 186mm(D)

DELINEATOR POLE



Highly reflective grey band, makes it suitable for day and night use. Convenient T-top carry handle and bolt hole for hazard lamp attachment

- Model DP1100
- Size 1100mm(H)
- Weight 6.8 kg
- Base 420 mm x 420mm

DETACHABLE BOLLARD (WITH RING TOP)



Detachable bollard for wider driveway (when required)

- Model CC-E05-0
- Size 800mm(H)
- Weight 2.7 kg
- Base 260mm(D)

STAINLESS STEEL BOLLARD



Semi dome stainless steel bollard, maintenance free and premium look

- Model BOLLARD-SUS
- Size 1000mm x 1000mm(H)